

P/2 DA Series

VGA DISTRIBUTION AMPLIFIERS
WITH STEREO AUDIO

- 350 MHz (-3dB) RGB video bandwidth, fully loaded
- Compatible with VGA-QXGA resolutions
- DDC signals and ID bits routed to local monitor output
- Internal universal power supply



P/2 DA6xi



P/2 DA8



P/2 DA12 A

The Extron P/2 DA Series are VGA distribution amplifiers with four, six, eight, or twelve outputs. They are suitable for applications where a single, high resolution computer-video signal must be split and distributed to multiple displays.



Extron® Electronics

www.extron.com

DESCRIPTION

The Extron **P/2 DA Series** are VGA distribution amplifiers with four, six, eight, or twelve outputs. Each unit accepts a single VGA input signal and actively splits it for distribution to multiple outputs. Offering 350 MHz (-3dB) of RGB video bandwidth, the P/2 DA Series is compatible with VGA-QXGA graphic cards, projectors and flat panel displays. Outputs are individually buffered and amplified to help maintain the original signal integrity and eliminate noise interference. ID bits are routed to output one for local monitor support. The P/2 DA Series is ideal for use in applications where one computer-video signal needs to be routed to multiple displays, such as rental and staging, courtrooms, conference rooms, and training facilities.

The **P/2 DA4xi** and **P/2 DA6xi** include a video gain switch which provides a signal boost to help maintain video signals integrity over long cable runs.

The **P/2 DA8** and **P/2 DA12** offer selectable input and output sync impedance. This provides better compatibility with a wide range of laptop types. These models also feature individual output muting via contact closure. This feature allows the user to mute any one or all outputs with simple pushbutton relay control, and eliminates the cost of an extra control system serial port.

The **P/2 DA8 A** and **P/2 DA12 A** have all the features of the **P/2 DA8** and **P/2 DA12** and add eight-output and twelve-output stereo distribution amplifiers, respectively. Both feature active PC audio buffering which converts unbalanced PC audio to balanced, line level signals, eliminating noise over long cable runs. Unbalanced stereo audio is input on 3.5 mm stereo mini jacks, while balanced or unbalanced stereo audio is output on captive screw connectors. Using pre-terminated cable assemblies, such as Extron's VGA with Audio Cables, eliminates crimping and makes installations faster and easier.

All **P/2 DA Series** models are housed in 1U high, rack-mountable enclosures. The **P/2 DA4xi** and **P/2 DA6xi** utilize a one-half rack width enclosure, while the **P/2 DA8** and **P/2 DA12** utilize a full rack width enclosure. All models are equipped with an internal, universal power supply for worldwide power compatibility.

COMMON FEATURES

- 350 MHz (-3dB) RGB video bandwidth, fully loaded
- Compatible with VGA-QXGA resolutions
- DDC signals and ID bits routed to local monitor output
- Internal universal power supply

P/2 DA4xi AND P/2 DA6xi


- **Video gain switch** – Provides signal boost to maintain video signal integrity over long cable runs.

P/2 DA8 AND P/2 DA12

- **Individual output muting via contact closure** – Mute any one or all outputs with simple pushbutton or relay control.
- **Selectable input and output sync impedance** – Sync impedance can be set for optimum compatibility with a wide range of laptop computers.

P/2 DA8 A AND P/2 DA12 A

- **Active PC audio buffering** – Converts unbalanced PC audio to a balanced, line level signal, eliminating noise over long cable runs.
- **Individual output muting via contact closure** – Mute any one or all audio outputs with simple pushbutton or relay control.
- **Selectable input and output sync impedance** – Sync impedance can be set for optimum compatibility with a wide range of laptop computers.

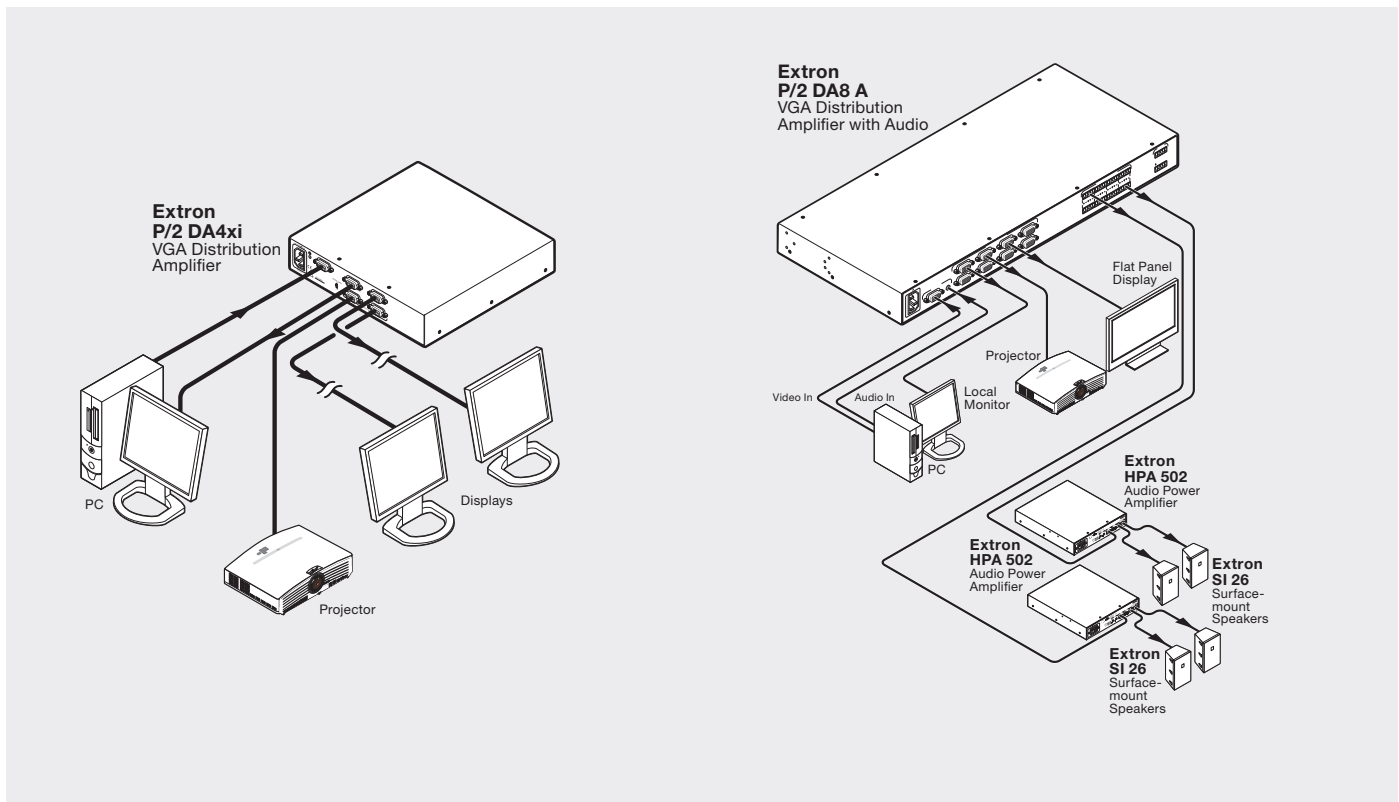

| VIDEO | |
|--------------------------------------|---|
| Gain | |
| P/2 DA4/6 xi | 0 dB or +3 dB (when input is 0.7 Vp-p, output is 0.7 V or 1.0 V), switchable |
| P/2 DA8/12 Series | Unity |
| Bandwidth | 350 MHz (-3 dB), fully loaded |
| VIDEO INPUT | |
| Number/signal type | 1 VGA-QXGA RGBHV, RGBS, RGSB, RsGsBs, HDTV component video, S-video, composite video |
| Nominal level | 1.0 Vp-p for Y of component video and S-video, and for composite video 0.7 Vp-p for RGB and for R-Y and B-Y of component video 0.3 Vp-p for C of S-video |
| Minimum/maximum levels | Analog: 0.3 V to 1.5 Vp-p with no offset at unity gain |
| Impedance | 75 ohms |
| Horizontal frequency | 15 kHz to 135 kHz |
| Vertical frequency | 30 Hz to 150 Hz |
| Return loss | <-40 dB @ 5 MHz |
| Input coupling | DC |
| VIDEO OUTPUT | |
| Number/signal type | 4, 6, 8, or 12 (depending on model) VGA-QXGA RGBHV, RGBS, RGSB, RsGsBs, HDTV component video, S-video, composite video (follows input type) |
| Connectors | 4, 6, 8, or 12 female 15-pin HD |
| Nominal level | 1.0 Vp-p for Y of component video and S-video, and for composite video 0.7 Vp-p for RGB and for R-Y and B-Y of component video 0.3 Vp-p for C of S-video |
| Minimum/maximum levels | 0.3 V to 1.5 Vp-p (follows input) |
| Return loss | <-40 dB @ 5 MHz |
| DC offset | ±5 mV with input at 0 offset |
| SYNC | |
| Input type | RGBHV, RGBS, RGSB, RsGsBs; bi-level and tri-level sync |
| Output type | |
| P/2 DA4/6 xi | RGBHV, RGBS, RGSB, RsGsBs; bi-level and tri-level sync (follows input) |
| P/2 DA8/12 Series | RGBHV, RGBS, RGSB, RsGsBs; bi-level and tri-level sync (follows input) Tri-level on Y, R-Y, B-Y channels (component video 720p, 1080i, 1080p) Bi-level on Y channel (for all other component video rates) |
| Input level | 2.0 V to 5.0 Vp-p |
| Output level | |
| P/2 DA4/6 xi | TTL: 5.0 Vp-p, unterminated |
| P/2 DA8/12 Series | 0.3 Vp-p for component video (bi-level sync) 0.6 Vp-p for component video (tri-level sync) TTL: 5.0 Vp-p, unterminated for RGBHV, RGBS |
| Input impedance | |
| P/2 DA4/6 xi | 510 ohms |
| P/2 DA8/12 Series | 10k ohms or 510 ohms (default), selectable |
| Output impedance | |
| P/2 DA4/6 xi | 50 ohms |
| P/2 DA8/12 Series | 50 ohms (default) or 75 ohms, selectable |
| Max. propagation delay | |
| P/2 DA4/6 xi | 60 ns |
| P/2 DA8/12 Series | >90 ns |
| Max. rise/fall time | 2 ns |
| Polarity | Positive or negative (follows input) |
| AUDIO — P/2 DA8 A, P/2 DA12 A | |
| Gain | Unbal. output: 0 dB; bal. output: +6 dB |
| Frequency response | 20 Hz to 20 kHz, ±0.2 dB |
| THD + Noise | 0.03% @ 1 kHz at nominal level |
| S/N | >90 dB at maximum output (unweighted) |
| Crosstalk | <-45 dB @ 1 kHz |
| Stereo channel separation | >80 dB @ 1 kHz |

| AUDIO INPUT— P/2 DA8 A, P/2 DA12 A | | |
|---|---|-------------|
| Impedance | >10k ohms unbalanced, DC coupled | |
| Nominal level | -10 dBV (316 mVrms) | |
| Maximum level | +16 dBu, (unbalanced) at 1% THD+N 0 dBu = 0.775 Vrms, 0 dBV = 1 Vrms, 0 dBV 2 dBu | |
| AUDIO OUTPUT – P/2 DA8 A, P/2 DA12 A | | |
| Number/signal type | 8 or 12 (depending on model) stereo, bal./unbal. | |
| Connectors | (8) or (12) 3.5 mm captive screw connectors, 5 pole | |
| Impedance | 50 ohms unbal., 100 ohms bal. | |
| Gain error | ±0.1 dB channel to channel | |
| Maximum level (Hi-Z) | >+28 dBu, bal., >+20 dBV unbal. at 1% THD+N | |
| Maximum level (600 ohm) | >+21 dBm, bal., >+18 dBm unbal. at 1% THD+N | |
| CONTROL/REMOTE – P/2 DA8 Series, P/2 DA12 Series | | |
| Contact closure mute control | (2) 3.5 mm captive screw connectors, 4 pole and (2) 3.5 mm captive screw connectors, 3 pole Contact closure pin configurations | |
| P/2 DA8 Series | A = mute all outputs, 1 = mute output 1, 2 = mute output 2, 3 = mute output 3, 8 = mute output 8 | |
| P/2 DA12 Series | A = mute all outputs, 1 = mute output 1, 2 = mute output 2, 3 = mute output 3, 12 = mute output 12 | |
| GENERAL | | |
| Power | | |
| P/2 DA4/6 xi | 100 VAC to 240 VAC, 50/60 Hz, 12 watts, internal | |
| P/2 DA8/12 Series | 100 VAC to 240 VAC, 50/60 Hz, 30 watts, internal | |
| Cooling | Convection, no vents | |
| Mounting - Rack mount | | |
| P/2 DA4/6 xi | Yes, with optional 1U, 9.5" deep rack shelf (RSU 129, part #60-190-01; RSB 129, 60-604-01); or 1U, 6" deep rack shelf (RSU 126, #60-190-10; RSB 126, 60-604-10) | |
| P/2 DA8/12 Series | Yes, with included brackets, MBD 149, part #70-077-03 | |
| Furniture mount | | |
| P/2 DA4/6 xi | Yes, with optional under-desk mounting kit, part #70-077-01 (MBU 125); or through-desk mounting kit, part #70-077-02 (MBD 129) | |
| P/2 DA8/12 Series | Yes, with optional under-desk mounting kit MBD 149, part #70-222-01 | |
| Enclosure dimensions | | |
| P/2 DA4/6 xi | 1.6" H x 8.7" W x 6.0" D (1U high, half rack wide) (4.1 cm H x 22.1 cm W x 15.2 cm D)(Depth excludes connectors.) | |
| P/2 DA8/12 Series | 1.7" H x 17.4" W x 8.5" D (1U high, full rack wide) (4.3 cm H x 44.2 cm W x 21.6 cm D) (Depth excludes connectors.) | |
| Product weight | | |
| P/2 DA4/6 xi | 2.0 lbs (0.9 kg) | |
| P/2 DA8/12 Series | 6.0 lbs (2.7 kg) | |
| Shipping weight | | |
| P/2 DA4xi | 4 lbs (2 kg) | |
| P/2 DA6xi | 5 lbs (3 kg) | |
| P/2 DA8/12 Series | 9 lbs (5 kg) | |
| DIM weight (P/2 DA8/12 Series) | | |
| USA/Canada | 10 lbs (5 kg) | |
| International | 11 lbs (5 kg) | |
| Listings | UL, CUL | |
| Compliances | CE, FCC Class A, VCCI, AS/NZS, ICES | |
| NOTE: All nominal levels are at ±10%. | | |
| Model | Version Description | Part Number |
| P/2 DA4xi | 1x4 VGA-QXGA | 60-246-03 |
| P/2 DA6xi | 1x6 VGA-QXGA | 60-245-03 |
| P/2 DA8 A | 1x8 VGA-QXGA with Audio | 60-891-01 |
| P/2 DA8 | 1x8 VGA-QXGA | 60-891-02 |
| P/2 DA12 A | 1x12 VGA-QXGA with Audio | 60-893-01 |
| P/2 DA12 | 1x12 VGA-QXGA | 60-893-02 |

Specifications are subject to change without notice.

PANEL DRAWINGS



P/2 DA4xi - Front




P/2 DA4xi - Back




P/2 DA6xi - Front




P/2 DA6xi - Back

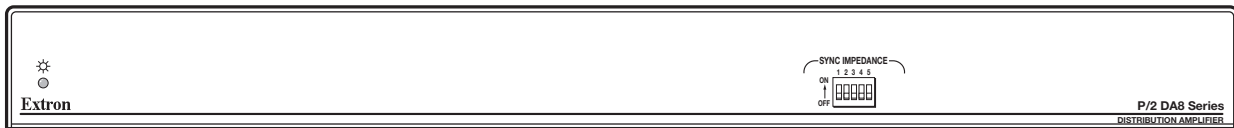


P/2 DA8 & P/2 DA8 A - Front

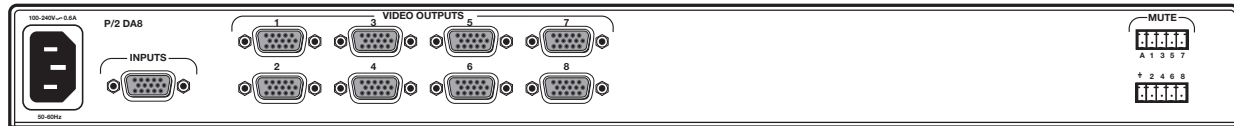


P/2 DA8 - Back

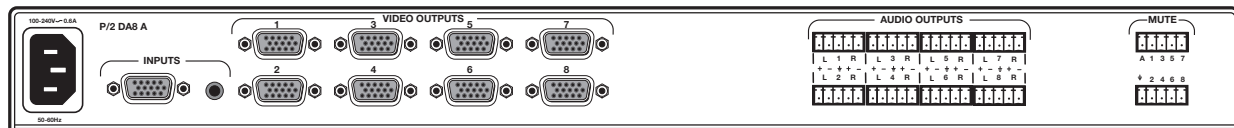


P/2 DA8 A - Back

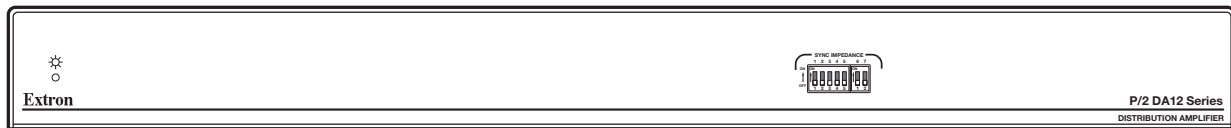

P/2 DA12 & P/2 DA12 A - Front

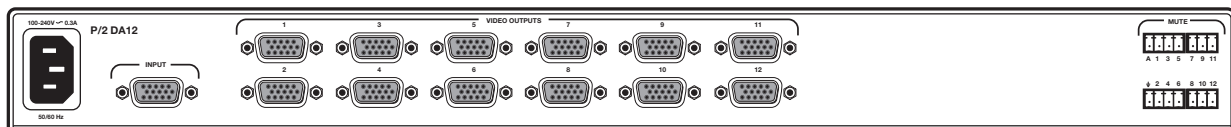

P/2 DA12 - Back

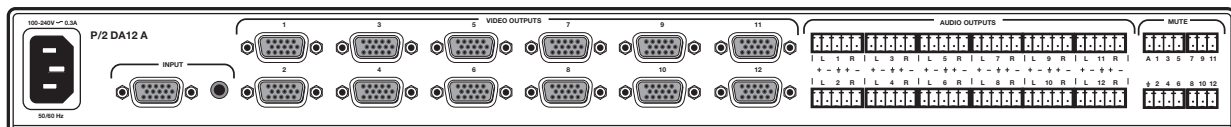

P/2 DA12 A - Back



Extron USA - West
Headquarters
+800.633.9876
Inside USA / Canada Only
+1.714.491.1500
+1.714.491.1517 FAX

Extron USA - East
+800.633.9876
Inside USA / Canada Only
+1.919.863.1794
+1.919.863.1797 FAX

Extron Europe
+800.3987.6673
Inside Europe Only
+31.33.453.4040
+31.33.453.4050 FAX

Extron Asia
+800.7339.8766
Inside Asia Only
+65.6383.4400
+65.6383.4664 FAX

Extron Japan
+81.3.3511.7655
+81.3.3511.7656 FAX

Extron China
+400.883.1568
Inside China Only
+86.21.3760.1568
+86.21.3760.1566 FAX

Extron Dubai
+971.4.2991800
+971.4.2991880 FAX